


### Glazing design

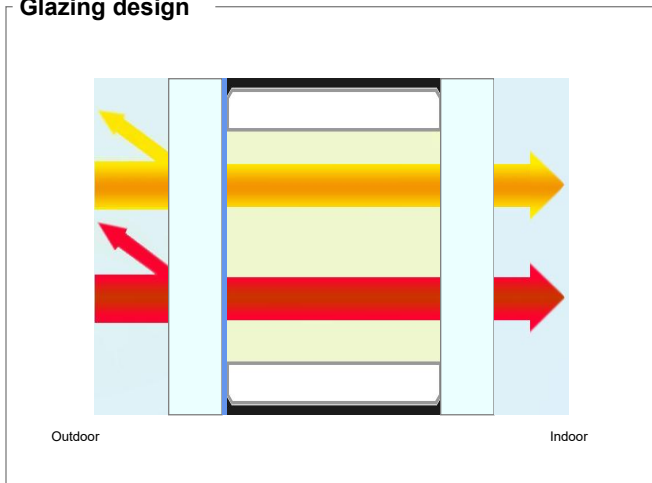

	First glazing	Second glazing
Gas		Argon 90% 16.00mm
Coating		
First glass	PLANICLEAR 4.00mm	PLANICLEAR 4.00mm
Coating	PLANISTAR EVO	
Layer		
Coating		
Second glass		
Coating		

### Sound transmission loss

**Rw(C;Ctr) = 31(-1;-4) dB**

Acoustic values according to EN 12758 and from notified body

Burglar resistance EN356 : **NPD**

### Manufacturing sizes

Nominal thickness : **24.0 mm**  
Weight : **20.0 kg/m<sup>2</sup>**

### Luminous factors (EN410-2011) : (D65 2°)

Transmittance : **61 %**  
Outdoor reflectance : **23 %**  
Indoor reflectance : **26 %**

### Energy factors (EN410-2011) :

Transmittance : **37 %**  
Outdoor reflectance : **39 %**  
Indoor reflectance : **44 %**  
Absorptance A1 : **23 %**  
Absorptance A2 : **1 %**

### Solar factors (EN410-2011) :

g : **0.39**  
Shading coefficient : **0.45**

### Thermal transmission (EN673-2011) - 0° related to vertical position

Ug : **1.0 W/(m<sup>2</sup>.K)**



GLOBAL-SAMARAS  
GLOBAL IG  
NAOUSSA  
STENIMACHOS A2  
59200

GREECE

Phone :  
Mobile :  
Fax :  
info@globalig.gr

2332042166  
6986001000  
2332042176

CALUMEN® II is a simulation software to calculate key performance of glass such as light transmission, solar factor or thermal insulation coefficient. Computed values are indicative and subject to change. They can not be used to guarantee performance of the products.

These values are calculated according to EN410-2011 and EN673-2011 standards. Tolerances are defined according to EN 1096-4 or ISO9050-2003 standards. Nevertheless, user must check the feasibility of the associated products, in particular in terms of thickness and colour. Furthermore, it is his responsibility to check that the resulting combination of glazing meets regulatory requirements at national, local or regional level. Computed values with NFRC-2010 standards are indicative. Please use NFRC certified software for certified values. User must check the feasibility of the associated products, in particular in terms of thickness and colour. Furthermore, it is his responsibility to check that the resulting combination of glazing meets regulatory requirements at national, local or regional level.

