


Glazing design

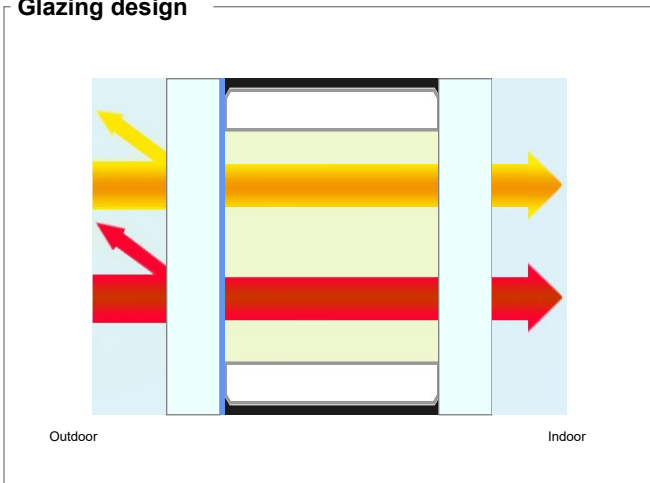

	First glazing	Second glazing
Gas		Argon 90% 16.00mm
Coating		
First glass	PLANICLEAR 4.00mm	PLANICLEAR 4.00mm
Coating	PLANITHERM XN	
Layer		
Coating		
Second glass		
Coating		

Sound transmission loss

Rw(C;Ctr) = 31(-1;-4) dB

Acoustic values according to EN 12758 and from notified body

Burglar resistance EN356 : **NPD**

Manufacturing sizes

Nominal thickness : **24.0 mm**
Weight : **20.0 kg/m²**

Luminous factors (EN410-2011) : (D65 2°)

Transmittance : **82 %**
Outdoor reflectance : **12 %**
Indoor reflectance : **11 %**

Energy factors (EN410-2011) :

Transmittance : **60 %**
Outdoor reflectance : **27 %**
Indoor reflectance : **27 %**
Absorptance A1 : **11 %**
Absorptance A2 : **3 %**

Solar factors (EN410-2011) :

g : **0.62**
Shading coefficient : **0.72**

Thermal transmission (EN673-2011) - 0° related to vertical position

Ug : **1.1 W/(m².K)**



GLOBAL-SAMARAS
GLOBAL IG
NAOUSSA
STENIMACHOS A2
59200

GREECE

Phone :
Mobile :
Fax :
info@globalig.gr

2332042166
6986001000
2332042176

CALUMEN® II is a simulation software to calculate key performance of glass such as light transmission, solar factor or thermal insulation coefficient. Computed values are indicative and subject to change. They can not be used to guarantee performance of the products.

These values are calculated according to EN410-2011 and EN673-2011 standards. Tolerances are defined according to EN 1096-4 or ISO9050-2003 standards. Nevertheless, user must check the feasibility of the associated products, in particular in terms of thickness and colour. Furthermore, it is his responsibility to check that the resulting combination of glazing meets regulatory requirements at national, local or regional level. Computed values with NFRC-2010 standards are indicative. Please use NFRC certified software for certified values. User must check the feasibility of the associated products, in particular in terms of thickness and colour. Furthermore, it is his responsibility to check that the resulting combination of glazing meets regulatory requirements at national, local or regional level.

